


Contract Limits and Location Sketch

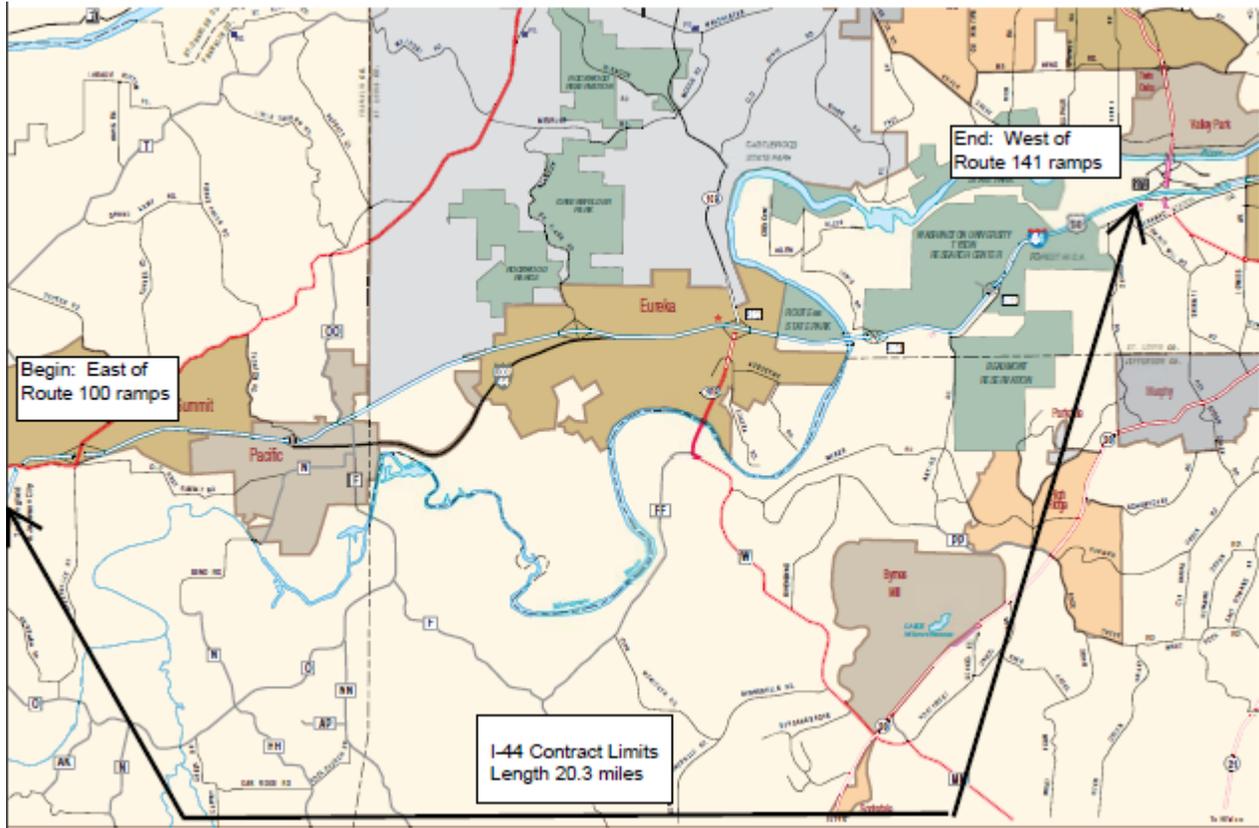

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
 First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
 Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

Route I-44 Project Limits

Begin Point: East of the Route 100 West Interchange
 (approximate mile marker 251.6)
 End Point: West of Route 141 Interchange
 (approximate mile marker 272.4)

Note: Includes interchanges and outer roads as described in the details below.

Route 100 to St Louis County Line Location Specific Details:

1) A fifteen (15) foot wide strip along the edge of the outside shoulders for cuts one (1) through three (3), and cut four (4) shall be thirty (30) foot wide within the following mile marker locations;

<u>Westbound</u>	<u>Eastbound</u>
• 251.1 to 252.2	251.5 to 252.2
• 253.2 to 253.3	253.9 to 254.7
• 254.4 to 255.5	255.3 to 256.0
• 255.8 to 256.0	

2) A fifteen (15) foot wide strip shall be cut along the edge of the outside shoulders for cuts one (1) through four (4) within the following mile marker locations;

<u>Westbound</u>	<u>Eastbound</u>
• None	252.7 to 253.0

Ramp Details:

Westbound	RIGHT SIDE OF RAMP	LEFT SIDE OF RAMP
Exit 257 Viaduct, Pacific	Nothing Needed	15' cut only
Entrance 257 Viaduct, Pacific	Nothing Needed	15' cut only
Exit 253 100, Gray Summit	15' cut only	15' cut only
Entrance 253 100, Gray Summit	Nothing Needed	Nothing Needed
Eastbound	RIGHT SIDE OF RAMP	LEFT SIDE OF RAMP
Exit 253 100, Gray Summit	15' cut only	Nothing Needed
Entrance 253 100, Gray Summit	15' cut only	Nothing Needed
Exit 257 Osage, Pacific	15' cut only	15' cut & entire quadrant
Entrance 257 Osage, Pacific	15' cut only	15' cut & entire quadrant

Franklin County Line to Lewis Road Location Specific Details:

I-44 MM: 258.4-258.8
 Full Mow Out: 9.33 Acres
 Acres Per Edge Cut: 4.27 Acres

I-44 MM: 258.8-259.2
 Full Mow Out: 14.17 Acres
 Acres Per Edge Cut: 5.06 Acres

I-44 MM: 259.2-259.8
 Full Mow Out: 13.44 Acres
 Acres Per Edge Cut: 4.32 Acres

I-44 MM: 259.8-260.4
 Full Mow Out: 9.59 Acres
 Acres Per Edge Cut: 4.85 Acres

I-44 MM: 260.4-160.8
 Full Mow Out: 8.34 Acres
 Acres Per Edge Cut: 5.16 Acres

I-44 MM: 260.8-261.4
 Full Mow Out: 8.21 Acres
 Acres Per Edge Cut: 5.38 Acres

I-44 MM: 261.4-262.4
Full Mow Out: 21.01 Acres
Acres Per Edge Cut: 9.86 Acres

I-44 MM: 262.4-263.4
Full Mow Out: 12.51 Acres
Acres Per Edge Cut: 8.52 Acres

I-44 MM: 263.4-264.4
Full Mow Out: 4.63 Acres
Acres Per Edge Cut: 4.63 Acres

I-44 MM: 264.4-264.8
Full Mow Out: 3.07 Acres
Acres Per Edge Cut: 3.07 Acres

I-44 MM: 264.8-265.0
Full Mow Out: 16.98 Acres
Acres Per Edge Cut: 4.82 Acres

I-44 MM: 265.0-265.4
Full Mow Out: 11.30 Acres
Acres Per Edge Cut: 7.03 Acres

I-44 MM: 265.4-266.0
Full Mow Out: 4.74 Acres
Acres Per Edge Cut: 4.74 Acres

I-44 MM: 266.0-266.4
Full Mow Out: 5.30 Acres
Acres Per Edge Cut: 5.30 Acres

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Includes interchanges and outer roads as shown in pictures 8 and 9 below.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>Westbound</u>	<u>Eastbound</u>
• 252.2 to 253.2	252.2 to 252.7
• 253.3 to 255.4	253.0 to 253.9
• 255.5 to 255.8	257.7 to 255.3
• 256.0 to 257.1	256.0 to 258.4
• 257.1 to 258.4	

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 15' MOWING CYCLE (APPROXIMATE): 125 ACRES
TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 210 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
125	X	3	=	375
210	X	1	=	210

TOTAL CONTRACT QUANTITY – MOWING: 585 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
125	X	3	=	375
210	X	1	=	210

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 585 ACRES

Contract Time for Completion of Work


The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:
 125 Acre Cycle: 6 Working Days
 210 Acre Cycle: 10 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

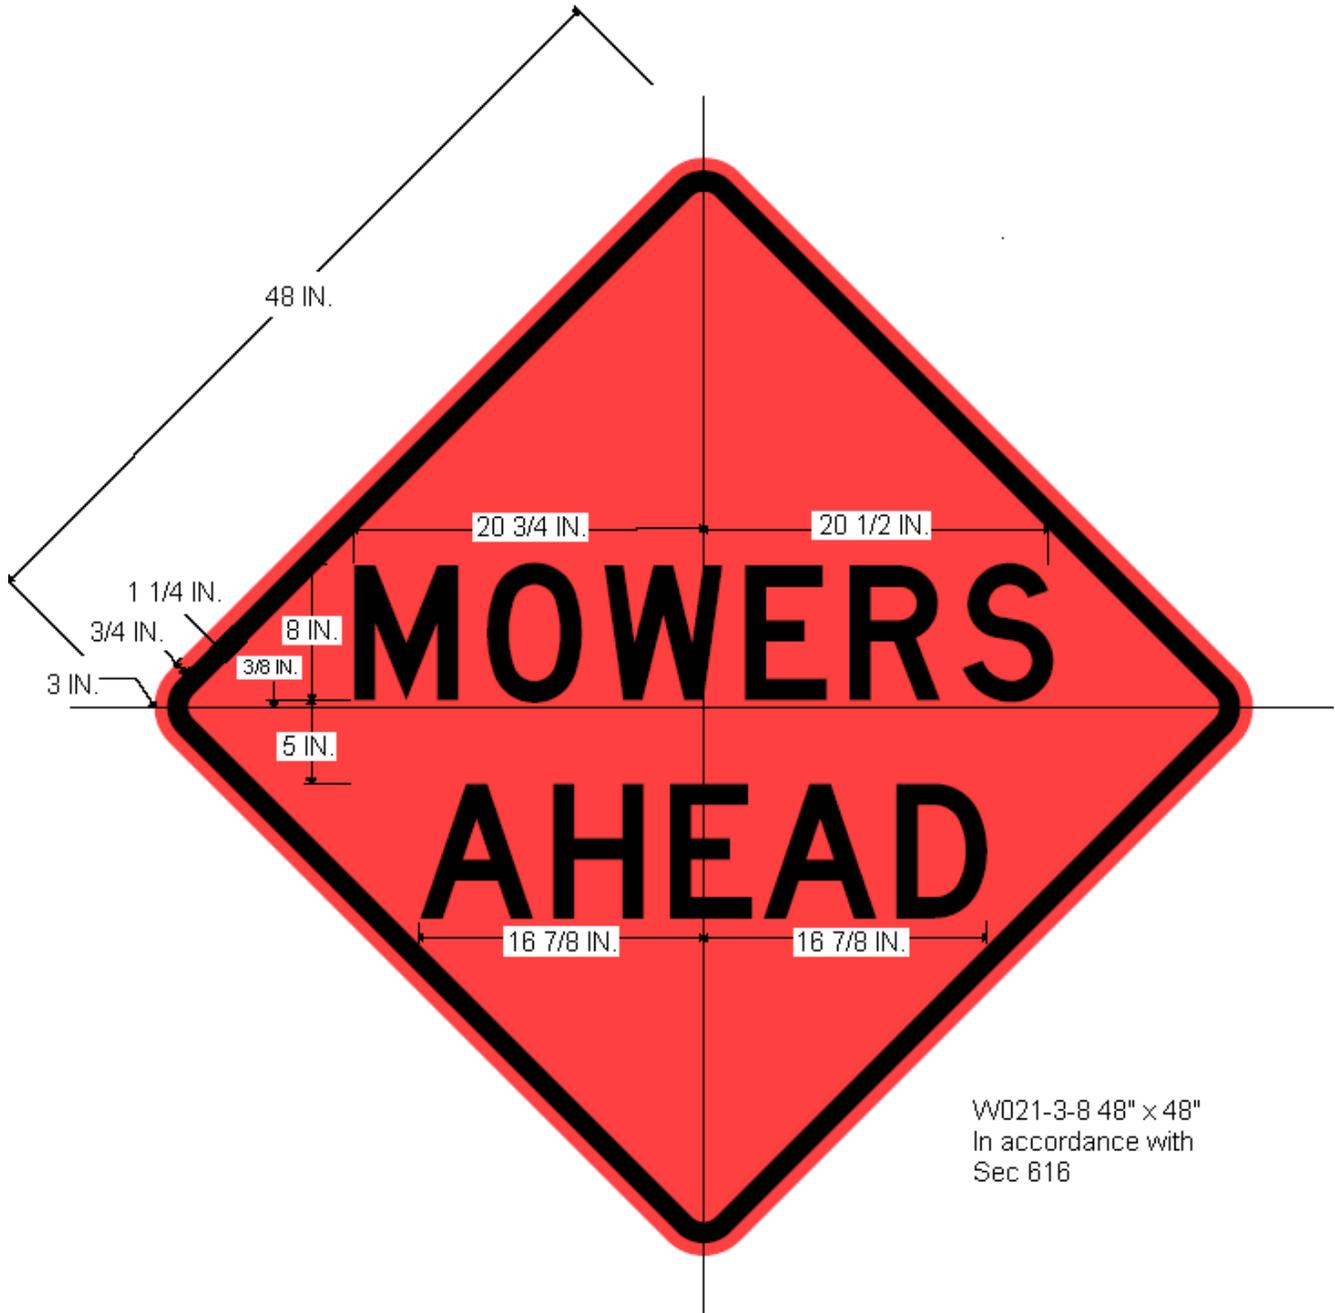

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange



