


M32 600lb Holding Force Magnalock




Application - 600 lb. holding force
Magnalock recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings. Specify 12 or 24 VDC when ordering.

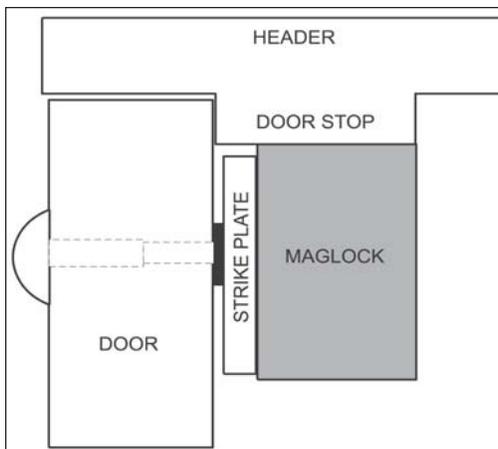

Features and Benefits

- Instant release circuit - no residual magnetism
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets, housings and dress covers
- Ten feet [3.05m] of jacketed, stranded conductor
- Also available in Senstat and Face Mount models
- **UL Listed**

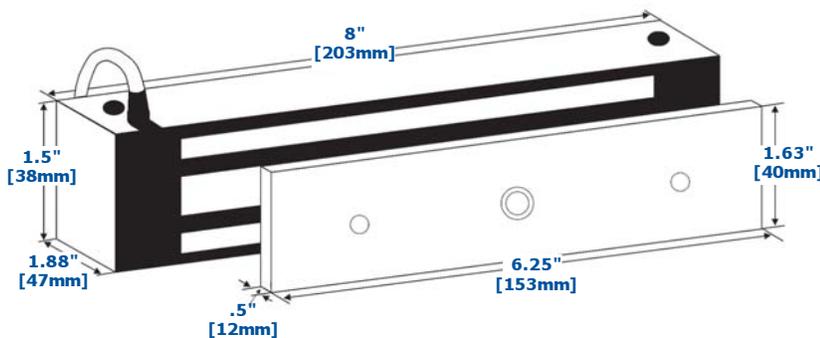

Specification Data

Holding Force: 600 lbs. [272 Kg.]
Current Draw and Voltage: 300mA at 12VDC; 150mA at 24VDC
Operating Temperature: -40 to +140F [-40 to +60C]
Warranty: MagnaCare Lifetime Replacement Warranty

How To Order - 12VDC

Part #	Description
M32-12	Magnalock Model 32 12VDC
M32SC-12	Model 32 Senstat 12VDC
M32F-12	Model 32 Face Mount 12VDC
M32SCF-12	Model 32 Senstat Face Mount 12VDC

How To Order - 24VDC


Part #	Description
M32-24	Magnalock Model 32 24VDC
M32SC-24	Model 32 Senstat 24VDC
M32F-24	Model 32 Face Mount 24VDC
M32SCF-24	Model 32 Senstat Face Mount 24VDC



M34 600lb Holding Force Magnalock




Application - 600 lb. holding force Magnalock with automatic dual voltage. Recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings.

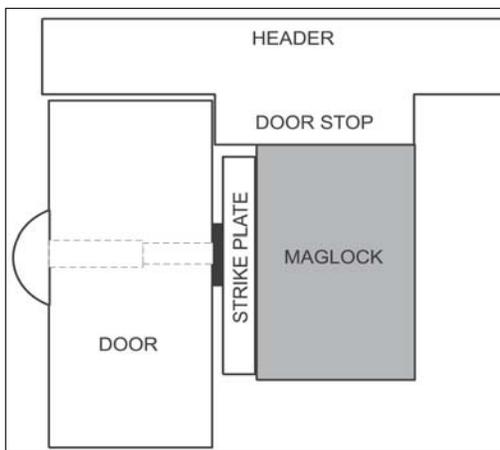

Features and Benefits

- Instant release circuit - no residual magnetism
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets, housings and dress covers
- Ten feet [3.05m] of jacketed, stranded conductor
- Automatic dual voltage - no field adjustment required
- Also available in Senstat and Face Mount models
- **UL Listed**

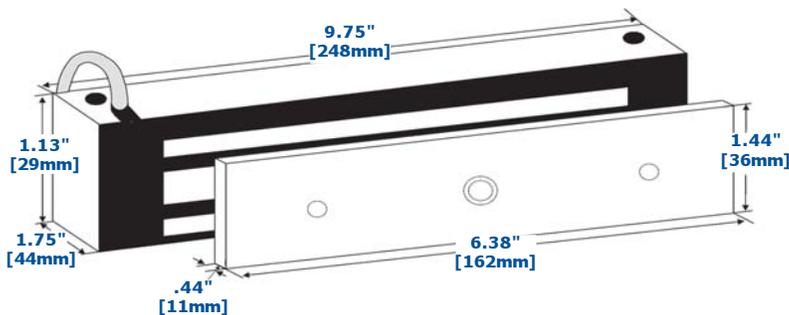

Specification Data

Holding Force: 600 lbs. [272 Kg.]
Current Draw and Voltage: 350mA at 12VDC; 175mA at 24VDC
Operating Temperature: -40 to +140F [-40 to +60C]
Warranty: MagnaCare Lifetime Replacement Warranty

How To Order


Part #	Description
M34	Magnalock Model 34
M34SC	Model 34 Senstat
M34F	Model 34 Face Mount
M34SCF	Model 34 Senstat Face Mount



M34R 600lb Holding Force Magnalock



Application - 600 lb. holding force Magnalock with automatic dual voltage for mounting in sliding doors. This results in an aesthetically appealing finished appearance. Recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings.

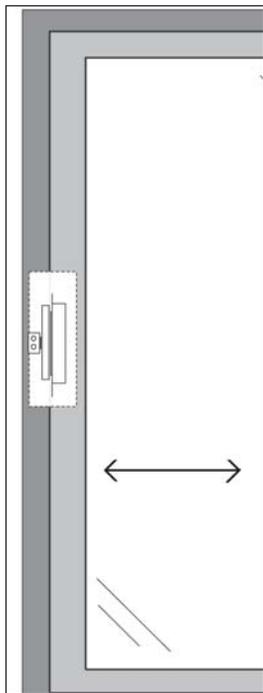

Features and Benefits

- Instant release circuit - no residual magnetism
- Recessed for aesthetically appealing finish
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Ten feet [3.05m] of jacketed, stranded conductor
- Automatic dual voltage - no field adjustment required
- Also available in Senstat model
- **UL Listed**

Specification Data

Holding Force: 600 lbs. [272 Kg.]



Current Draw and Voltage:

350mA at 12VDC; 175mA at 24VDC

Operating Temperature:

-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime Replacement Warranty

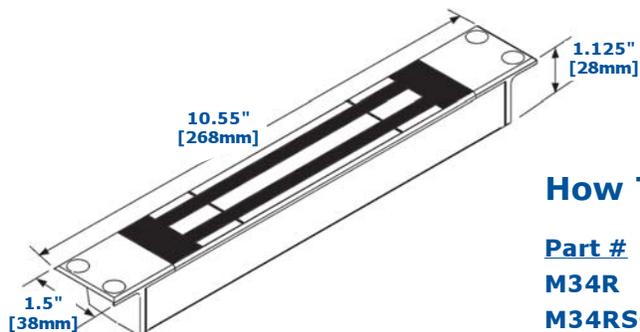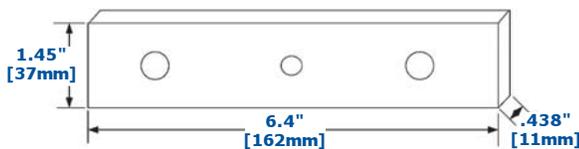

How To Order

Part #	Description
M34R	Magnalock Model 34 - Recessed
M34RSC	Magnalock Model 34 - Recessed Senstat





M38 600lb Holding Force Magnalock



Application - 600 lb. holding force Magnalock with automatic dual voltage. This model offers a built in wire access chamber and new bracket mount design for a unique method of installation. Recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings.

Features and Benefits

- Instant release circuit - no residual magnetism
- Surface mounts easily with mounting bracket using a minimum of tools
- Internal wire access chamber
- Mounted using steel machine screws into blind finishing nuts
- Brushed aluminum finish
- All ferrous metal surfaces plated to MIL specification
- Automatic dual voltage - no field adjustment required
- Dress covers available
- **UL Listed**

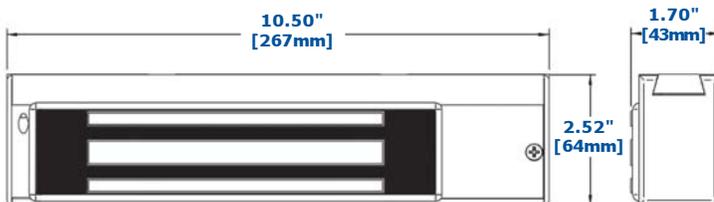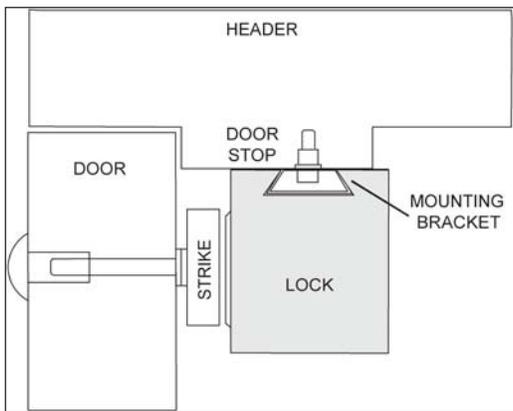

Specification Data

Holding Force: 600 lbs. [272 Kg.]
Current Draw and Voltage: 350mA at 12VDC; 175mA at 24VDC
Operating Temperature: -40 to +140F [-40 to +60C]
Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #	Description
M38	Magnalock Model 38
M38D	Model 38 Door Position
M38DL	Model 38 Door Position, LED
M38DLS	Model 38 Door Position, LED, Senstat
M38DLST	Model 38 Door Position, LED, Senstat, Tamper
M38DLT	Model 38 Door Position, Tamper
M38DS	Model 38 Door Position, Senstat
M38DST	Model 38 Door Position, Senstat, Tamper

Part #	Description
M38DT	Model 38 Door Position, Tamper
M38L	Model 38 LED
M38LS	Model 38 LED, Senstat
M38LT	Model 38 LED, Tamper
M38S	Model 38 Senstat
M38ST	Model 38 Senstat, Tamper
M38T	Model 38 Tamper

See page 19 for a full explanation of the M38 Options





M62 1200lb Holding Force Magnalock



Application - 1200 lb. holding force Magnalock with automatic dual voltage. Recommended for exterior and perimeter doors through which criminals could gain entrance to cause substantial economic loss.

Features and Benefits

- Instant release circuit - no residual magnetism
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets, housings and dress covers
- Ten feet [3.05m] of jacketed, stranded conductor
- Automatic dual voltage - no field adjustment required
- Also available in Senstat, Conduit, Double and Face Mount models
- **UL Listed**

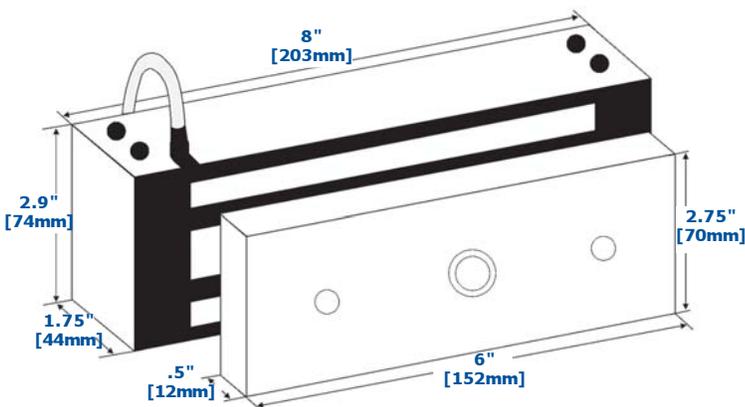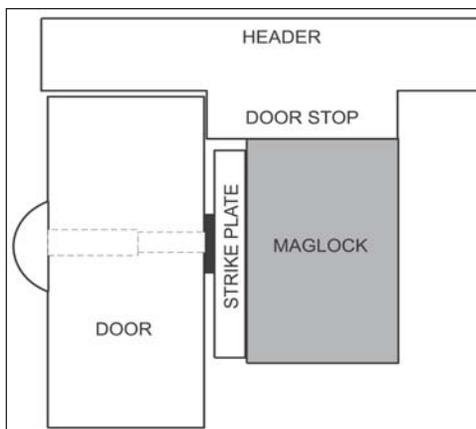

Specification Data

Holding Force: 1,200 lbs. [544 Kg.]
Current Draw and Voltage: 250mA at 12VDC; 125mA at 24VDC
Operating Temperature: -40 to +140F [-40 to +60C]
Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #	Description
M62	Model 62 Magnalock
M62F	Model 62 Face Mount Magnalock
M62FG	Model 62 Face Mount Conduit Mag.
M62G	Model 62 Conduit Magnalock
M62G-OS	Model 62 Conduit Offset Strike Mag.
M62G-SS	Model 62 Conduit Split Strike Mag.
M62-OS	Model 62 Offset Strike Magnalock
M62SC	Model 62 Senstat Magnalock

How To Order

Part #	Description
M62SCF	Model 62 Senstat Face Mount Magnalock
M62SCFG	Model 62 Senstat Face Mount Conduit Mag.
M62SCG	Model 62 Senstat Conduit Magnalock
M62SCG-OS	Model 62 Senstat Conduit Offset Strike Mag.
M62SCG-SS	Model 62 Senstat Conduit Split Strike Mag.
M62SC-OS	Model 62 Senstat Offset Strike Magnalock
M62SC-SS	Model 62 Senstat Split Strike Magnalock
M62-SS	Model 62 Split Strike Magnalock



DM62 Double Magnalock



Application - For double doors without a center mullion, the DM62 supplies two model 62 Magnalocks in a single, brushed stainless steel housing.

Features and Benefits

- Instant release circuit- no residual magnetism
- Electrically, both locks can be controlled as one or separately
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weather proof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets
- Ten feet [3.05m] of jacketed, stranded conductor for each lock
- Automatic dual voltage - no field adjustment required
- Also available in Senstat model
- **UL Listed**

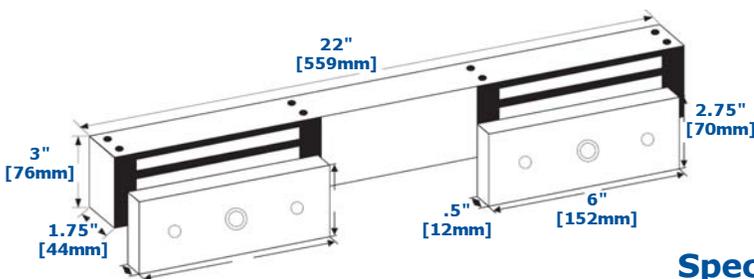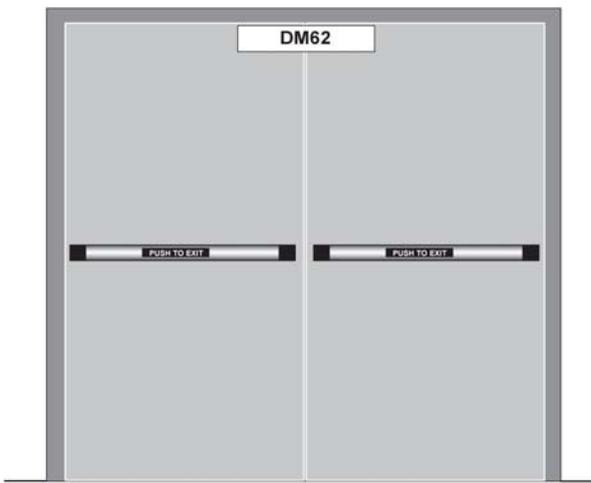

Specification Data

Holding Force: 1,200 lbs. [544 Kg.] per lock

Current Draw and Voltage:

250mA at 12VDC; 125mA at 24VDC per lock

Operating Temperature:

-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime

Replacement Warranty

How To Order

Part #	Description
DM62	M62 Double Magnalock
DM62SC	M62 Double Magnalock Senstat





M68 1200lb Holding Force Magnalock



Application - 1200 lb. holding force Magnalock with automatic dual voltage. This model offers a built in wire access chamber and new bracket mount design for a unique method of installation. Recommended for exterior and perimeter doors through which criminals could gain entrance to cause substantial economic loss.

Features and Benefits

- Instant release circuit - no residual magnetism
- Surface mounts easily with mounting bracket using a minimum of tools
- Internal wire access chamber
- Mounted using steel machine screws into blind finishing nuts
- Brushed aluminum finish
- All ferrous metal surfaces plated to MIL specification
- Automatic dual voltage - no field adjustment required
- Dress covers available
- **UL Listed**

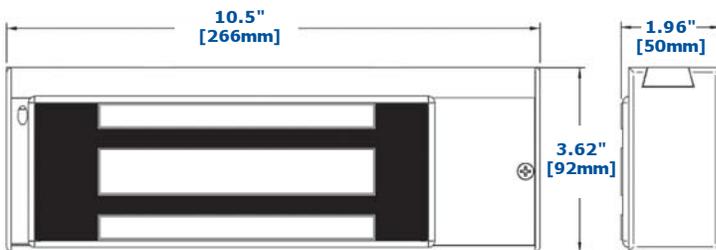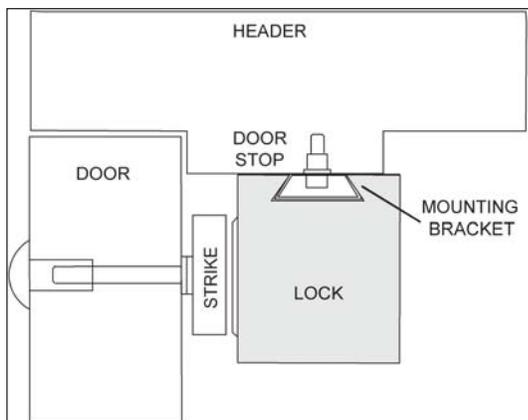

Specification Data

Holding Force: 1200 lbs. [544 Kg.]

Current Draw and Voltage:

300-325mA (options) at 12VDC
150-175mA (options) at 24VDC

Operating Temperature:

-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #	Description
M68	M68 Magnalock
M68D	M68 Door Position
M68DL	M68 Door Position, LED
M68DLS	M68 Door Position, LED, Senstat
M68DLST	M68 Door Position, LED, Senstat, Tamper
M68DLT	M68 Door Position, LED, Tamper
M68DS	M68 Door Position, Senstat
M68DST	M68 Door Position, Senstat, Tamper

How To Order

Part #	Description
M68DT	M68 Door Position, Tamper
M68L	M68 LED
M68LS	M68 LED, Senstat
M68LT	M68 LED, Tamper
M68S	M68 Senstat
M68ST	M68 Senstat, Tamper
M68T	M68 Tamper

Additional M68 part numbers listed on the following page

See all of Securitron's Magnalock brackets and accessories beginning on page 24



M68 Magnalock

How To Order - M68 Offset Strike

Part #	Description
M68D-OS	M68 Door Position, Offset Strike
M68DL-OS	M68 Door Position, LED, Offset Strike
M68DLS-OS	M68 Door Position, LED, Senstat, Offset Strike
M68DLST-OS	M68 Door Position, LED, Senstat, Tamper, Offset Strike
M68DLT-OS	M68 Door Position, LED, Tamper, Offset Strike
M68DS-OS	M68 Door Position, Senstat, Offset Strike
M68DST-OS	M68 Door Position, Senstat, Tamper, Offset Strike
M68DT-OS	M68 Door Position, Tamper, Offset Strike
M68L-OS	M68 LED, Offset Strike
M68LS-OS	M68 LED, Senstat, Offset Strike
M68LT-OS	M68 LED, Tamper, Offset Strike
M68S-OS	M68 Senstat, Offset Strike
M68ST-OS	M68 Senstat, Tamper, Offset Strike
M68T-OS	M68 Tamper, Offset Strike

How To Order - M68 Split Strike

Part #	Description
M68L-SS	M68 LED, Split Strike
M68LS-SS	M68 LED, Senstat, Split Strike
M68LT-SS	M68 LED, Tamper, Split Strike
M68S-SS	M68 Senstat, Split Strike
M68ST-SS	M68 Senstat, Tamper, Split Strike
M68T-SS	M68 Tamper, Split Strike

OFFSET STRIKES

- Available for the 62, 68 and 82 Magnalocks
- Alter the position of the mounting hole by 1/4" [6mm]

SPLIT STRIKES

- Allow a single 32, 62, 68 or 82 Magnalock to secure a double door at traffic control holding force level

See page 25 for Offset and Split Strikes

M38 and M68 Options and Upgrade Kits

SENSTAT: The Senstat option provides a lock status sensing signal which positively indicates that the door is secure. This interfaces with access control or alarm systems and is superior to the commonly used door position switch which indicates that the door is closed but not that it is secure. All Senstat Magnalocks use Form 'C' isolated contacts. **Order above.**

LED: The LED extends through the back of the M38 or M68 Magnalock to give visual status of the lock. On locks with the Senstat option the LED will be green when the lock is powered but not secure and red when the lock is secure. Locks without the Senstat option will only indicate green when powered. **Order above.**



DOOR POSITION: The DPS Door Position Switch can be used to provide a remote signal indicating if the door is open or closed. Typically used for auto relock with an access control system. **Order above. To add this upgrade kit to existing M38 or M68 locks, choose part # M38/68D-KIT.**



ANTI-TAMPER SENSOR (TAMPER): The Anti-Tamper Switch option provides an SPDT switch output that will indicate if the wire access chamber cover has been tampered with or removed. Typically would be connected to an alarm point on an alarm panel or access control system. **Order above. To add this upgrade kit to existing M38 or M68 locks, choose part # M38T-KIT or M68T-KIT.**



See all of Securitron's Magnalock brackets and accessories beginning on page 24




M82 1800lb Holding Force Magnalock




Application - 1800 lb. holding force Magnalock with automatic dual voltage and Senstat monitoring function standard. Preferred by prisons and detention facilities, and also functions best on large, high security gates.

Features and Benefits

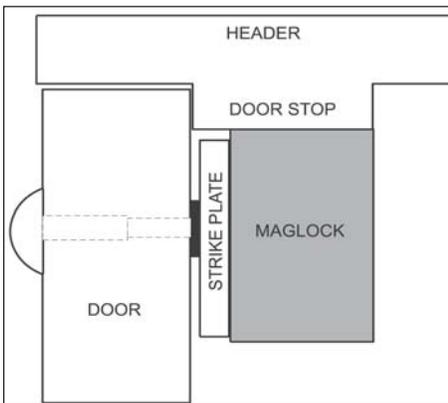

- Instant release circuit - no residual magnetism
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets, housings and dress covers
- Ten feet [3.05m] of jacketed, stranded conductor
- Automatic dual voltage - no field adjustment required
- Also available in Conduit and Face Mount models
- **UL Listed**

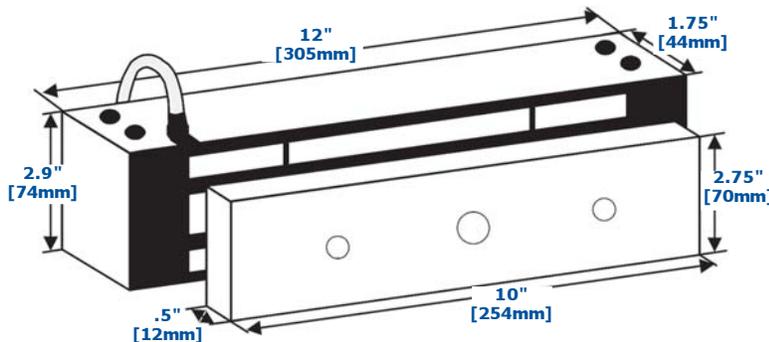

Specification Data

Holding Force: 1,800 lbs. [816 Kg.]

Current Draw and Voltage:

350mA at 12VDC; 175mA at 24VDC

Operating Temperature:

-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #	Description
M82SC	Magnalock Model 82 Senstat
M82SCF	M82 Senstat Face Mount
M82SCFG	M82 Senstat Face Mount Conduit
M82SCG	M82 Senstat Conduit

How To Order

Part #	Description
M82SCG-OS	M82 Senstat Conduit Offset Strike
M82SCG-SS	M82 Senstat Conduit Split Strike
M82SC-OS	M82 Senstat Offset Strike
M82SC-SS	M82 Senstat Split Strike


SAM-Shear Aligning Magnalock



Application - 1200 lb. holding force Shear Aligning Magnalock mounts fully concealed into wood, steel or aluminum doors. SAM can also be installed in any position on the door - top, side or bottom and is ideal for swing through and sliding doors.



Features and Benefits

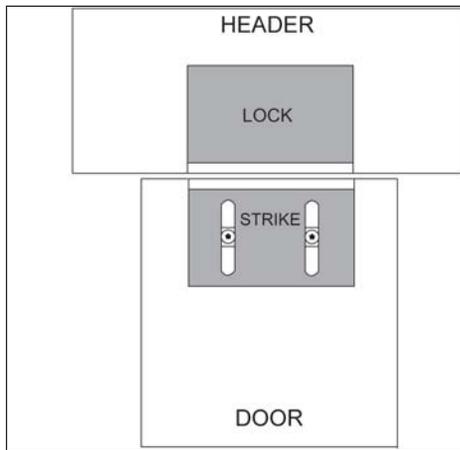

- Instant release circuit - no residual magnetism
- Mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets
- Ten feet [3.05m] of jacketed, stranded conductor
- Automatic dual voltage - no field adjustment required
- **UL Listed**


Specification Data

Holding Force: 1,200 lbs. [544 Kg.]

Current Draw and Voltage:
350mA at 12VDC; 175mA at 24VDC

Operating Temperature:
-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime Replacement Warranty

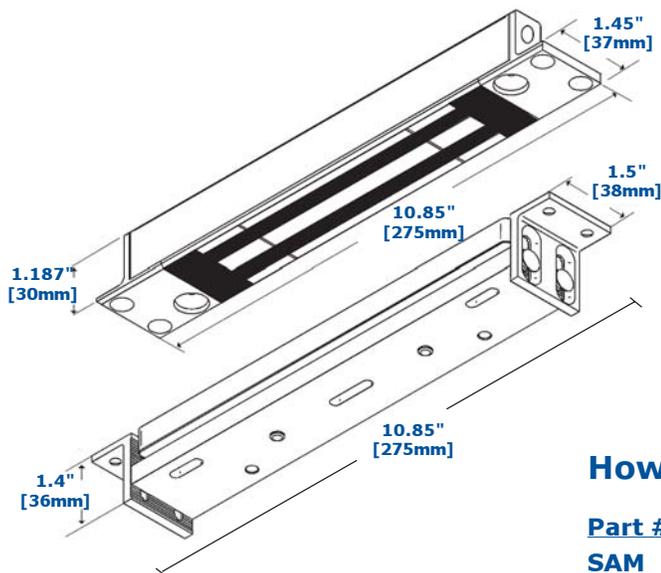

How To Order

Part #	Description
SAM	Shear Aligning Magnalock
SAMSC	Shear Aligning Magnalock Senstat



SAM2-24- Shear Aligning Magnalock





Application - 600 lb. holding force Shear Aligning Magnalock mounts fully concealed and is ideal for smaller applications, like cabinet doors and sliding closet doors. 24 VDC only.



Features and Benefits

- Instant release circuit - no residual magnetism
- Mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Ten feet [3.05m] of jacketed, stranded conductor
- Smaller dimensions for difficult installation areas
- **UL Listed**

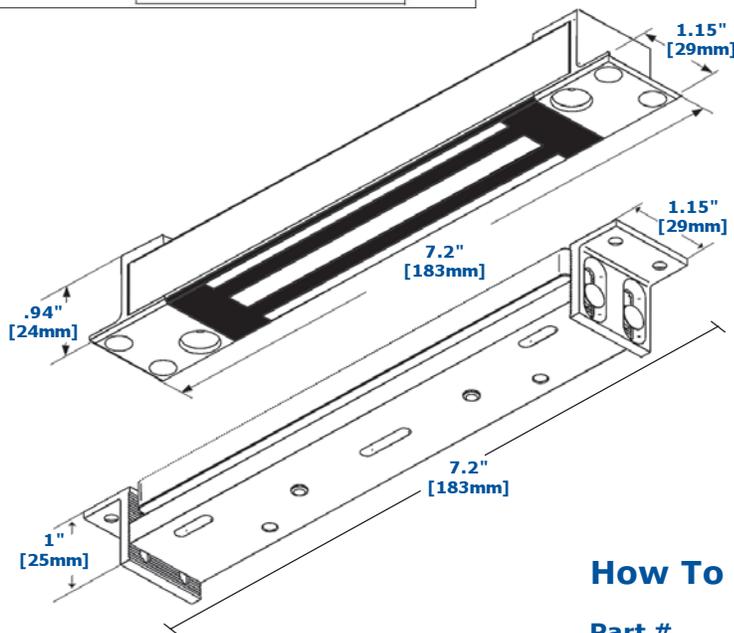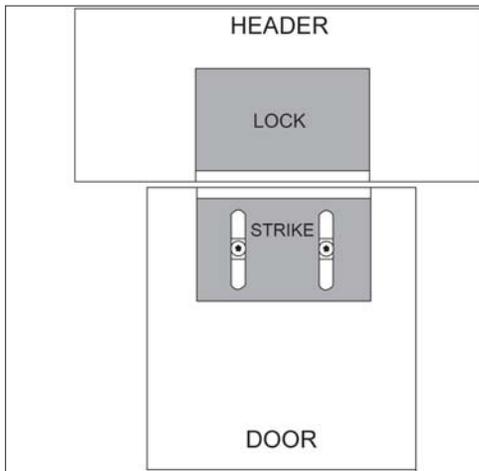

Specification Data

Holding Force: 600 lbs. [272 Kg.]

Current Draw and Voltage:

62mA at 24VDC only

Operating Temperature:

-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #
SAM2-24

Description
SAM2 Magnalock 24VDC




MCL 200lb Holding Force Magnalock




Application - 200 lb. holding force. Typical applications include: jewelry cases, museum cases, gun cabinets, pharmaceutical storage cabinets, cash drawers and any sort of door or drawer which will physically accommodate the lock.

Features and Benefits

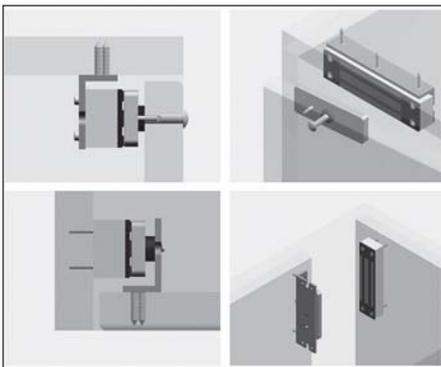

- Instant release circuit - no residual magnetism
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Six feet [1.8m] of jacketed, stranded conductor

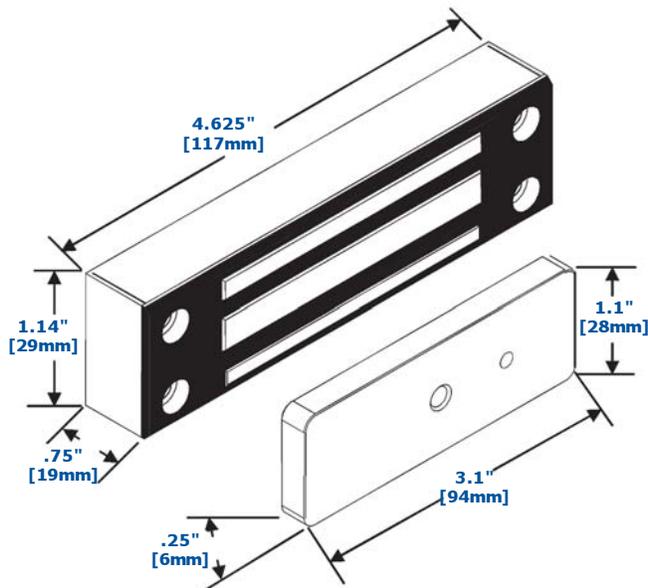

Specification Data

Holding Force: 200 lbs. [91 Kg.]

Current Draw and Voltage:
62mA at 24VDC only

Operating Temperature:
-40 to +140F [-40 to +60C]

Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #
MCL-24

Description
Magnetic Cabinet Lock 24VDC



Magnalock Accessories



INSTALLATION KIT (IK)

Securiton's original Installation Kit

- SDG-1** Heavy Duty Drill Guide
- BPT-2** Blind Nut Placement Tool
- SB-1** Sex Bolt- 32/62/82
- SD-375** T-Handle Hex Wrench
- SEP-1** Hardware Pack- 62/82
- SEP-2** Hardware Pack- 32
- RW-1** Rubber Washers
- FW-1** Flat Washers
- ICC-1** Insulated Crimpers


- TL-1** Threadlock
- COD-125** 1/8" Cobalt Drill Bit
- COD-375** 3/8" Cobalt Drill Bit
- CAD-375** 3/8" Carbide Drill Bit
- HS-500** 1/2" High Speed Drill Bit
- BN-250** Blind Nuts
- FC-1** Finish Caps
- VIDEO-2** Site Survey Video
- IK** *All Listed Components*

CONDENSED INSTALLATION KIT (IK2)

Just the essentials

The complete IK and IK2 kits provide substantial savings over purchasing the same items separately


- SDG-1** Heavy Duty Drill Guide
- BPT-2** Blind Nut Placement Tool
- TL-1** Threadlock
- BN-250** Blind Nuts
- IK2** *All Listed Components*

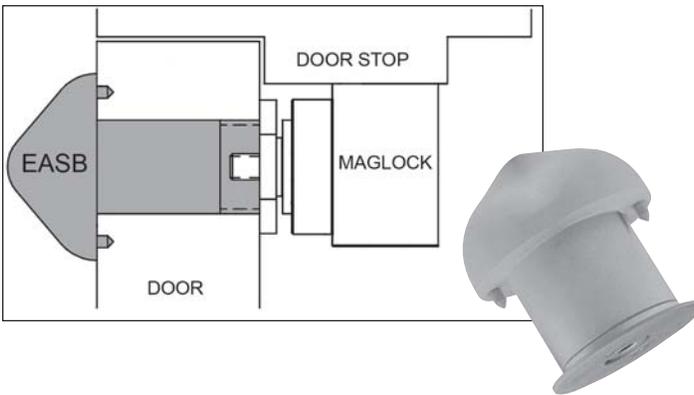

EASB-ENERGY ABSORBING SEX BOLT

- For high security applications on inflexible doors
- Replaces the standard sex bolt
- Contains a powerful internal spring to absorb and dissipate the force of a blow

- EASB-34** Sex Bolt, Energy Absorbing M34
- EASB-62** Sex Bolt, Energy Absorbing M62/M68
- EASB-82** Sex Bolt, Energy Absorbing M82

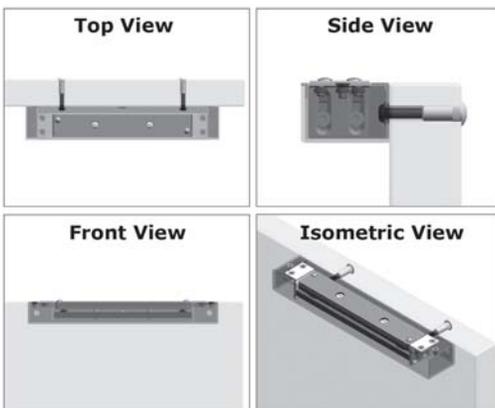

SAM SURFACE MOUNT KIT

- For specialty applications
- Permits the SAM magnet, strike, or both to be surface mounted when mortising is not possible



- SMLS** Surface Mount Lock Housing
- SMSS** Surface Mount Strike Housing

Magnalock Accessories

OFFSET STRIKES

- Available for the 62, 68 and 82 Magnalocks
- Alters the position of the mounting hole by 1/4" [6mm]



Part numbers shown here are for strikes ONLY. To order a Magnalock with an offset strike, add "OS" to the part number. See the corresponding lock feature page for a complete list of applicable part numbers.

AOS-62 Replacement 1/4" Offset Strike - M62, M68

AOS-82 Replacement 1/4" Offset Strike - M82

SPLIT STRIKES

- Allow a single M32, M38, M62, M68 or M82 Magnalock to secure a double door at traffic control holding force level.



Part numbers shown here are for strikes ONLY. To order a Magnalock with an offset strike, add "SS" to the part number. See the corresponding lock feature page for a complete list of applicable part numbers.

ASS-32 Replacement Split Strike Set - M32, M38

ASS-62 Replacement Split Strike Set - M62, M68

ASS-82 Replacement Split Strike Set - M82

FULL LENGTH HOUSINGS

- Vertical or horizontal configurations
- Fit one or two locks (not included)
- SLR = single lefthand reverse
- SRR = single righthand reverse



Custom cut per application

Please provide required lengths when ordering

HHD-32 Full Length Housing M32 Dbl. Horizontal

HHD-62 Full Length Housing M62 Dbl. Horizontal

HHD-82 Full Length Housing M82 Dbl. Horizontal

HHSL-32 Full Length Housing M32 SLR Horizontal

HHSL-62 Full Length Housing M62 SLR Horizontal

HHSL-82 Full Length Housing M82 SLR Horizontal

HHSR-32 Full Length Housing M32 SRR Horizontal

HHSR-62 Full Length Housing M62 SRR Horizontal


HHSR-82 Full Length Housing M82 SRR Horizontal

HVD-32 Full Length Housing M32 Dbl. Vertical

HVD-62 Full Length Housing M62 Dbl. Vertical

HVD-82 Full Length Housing M82 Dbl. Vertical

Vertical Housing

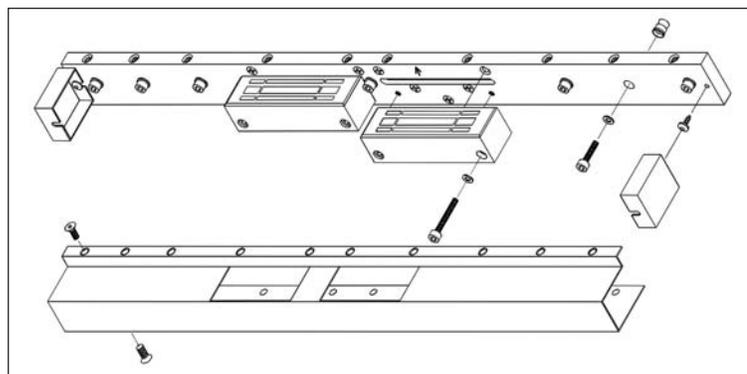


Horizontal Housing



Magnalock Accessories/Brackets

MOUNTING BRACKETS

- The M32, M38 and M68 Magnalocks require 2.25 inches of flat mounting space.
- The M34 Magnalock requires 1.875 inches of flat mounting space.
- The M62 & M82 Magnalocks require 2.5 inches of flat mounting space.
- Multiple brackets may be needed for some applications.

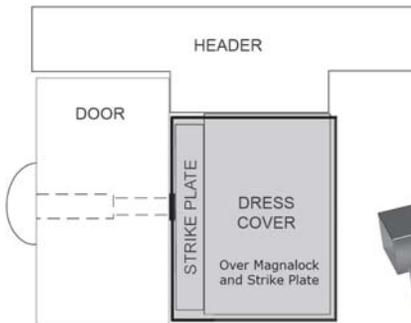


Dress Covers (DC)

- Available for the M32, M34, M38, M62, M68 and M82
- Install using foam adhesive
- Available in four finishes

Dress Cover finishes shown on page 83

DC-32CL	Dress Cover M32 Clear
DC-32BK	Dress Cover M32 Black
DC-32SP	Dress Cover M32 Stainless Polished
DC-32BP	Dress Cover M32 Brass Polished
DC-34CL	Dress Cover M34 Clear
DC-34BK	Dress Cover M34 Black
DC-34SP	Dress Cover M34 Stainless Polished
DC-34BP	Dress Cover M34 Brass Polished
DC-38CL	Dress Cover M38 Clear
DC-38BK	Dress Cover M38 Black
DC-38SP	Dress Cover M38 Stainless Polished
DC-38BP	Dress Cover M38 Brass Polished
DC-62CL	Dress Cover M62 Clear
DC-62BK	Dress Cover M62 Black
DC-62SP	Dress Cover M62 Stainless Polished
DC-62BP	Dress Cover M62 Brass Polished
DC-68CL	Dress Cover M68 Clear
DC-68BK	Dress Cover M68 Black
DC-68SP	Dress Cover M68 Stainless Polished
DC-68BP	Dress Cover M68 Brass Polished
DC-82CL	Dress Cover M82 Clear
DC-82BK	Dress Cover M82 Black
DC-82SP	Dress Cover M82 Stainless Polished
DC-82BP	Dress Cover M82 Brass Polished

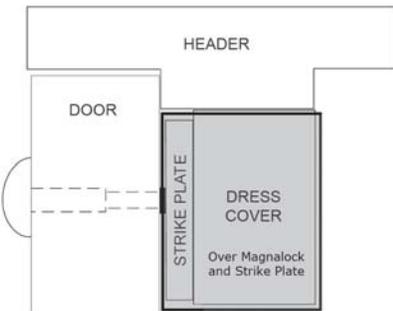


Dress Cover finishes shown on page 83

Double Dress Covers (DDC)

- Available in two finishes
- Will cover a pair of Magnalocks on a double door (if they are separated by not more than 2")
- Not for use with the DM62 Magnalock

DDC-32CL	Double Dress Cover M32 Clear
DDC-32BK	Double Dress Cover M32 Black
DDC-62CL	Double Dress Cover M62 Clear
DDC-62BK	Double Dress Cover M62 Black
DDC-82CL	Double Dress Cover M82 Clear
DDC-82BK	Double Dress Cover M82 Black

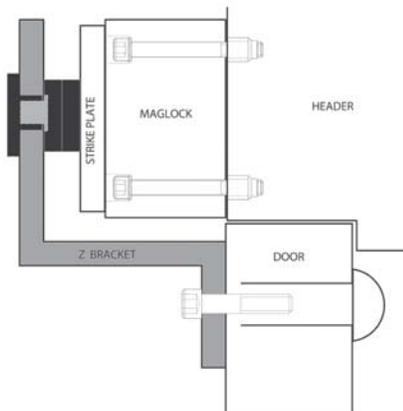


Z BRACKETS

- Used on inswing doors with the "F" type Magnalock. 8-3/8" length
- Includes a dress cover

Z-32CL	Z-Bracket M32 Clear
Z-32BK	Z-Bracket M32 Black
Z-32SS	Z-Bracket M32 Stainless Steel
Z-34CL	Z-Bracket M34 Clear
Z-34BK	Z-Bracket M34 Black
Z-34SS	Z-Bracket M34 Stainless Steel
Z-62CL	Z-Bracket M62 Clear
Z-62BK	Z-Bracket M62 Black
Z-62SS	Z-Bracket M62 Stainless Steel
Z-82CL	Z-Bracket M82 Clear
Z-82BK	Z-Bracket M82 Black
Z-82SS	Z-Bracket M82 Stainless Steel

Magnalock Brackets

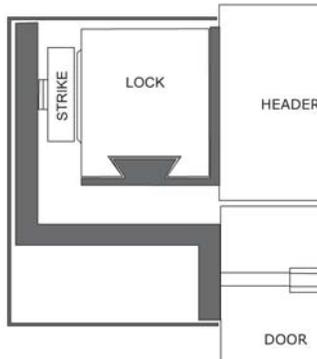


INSWING DOOR KIT - TOP JAMB (TJ)

- Used to mount the M38 or M68 lock on the secure side of a door that swings into a secured area
- Includes a Z Bracket, a dress cover and an 'L' bracket to mount the lock



- TJ-38CL** Inswing Door Kit M38 Clear
- TJ-38BK** Inswing Door Kit M38 Black
- TJ-68CL** Inswing Door Kit M68 Clear
- TJ-68BK** Inswing Door Kit M68 Black




ALUMINUM SPACER BRACKET (ASB)

- Used when a blade stop requires the Magnalock to be lowered
- Comes pre-drilled (lock specific) for the mounting bolts and wire
- Provides a blind nut for surface installation of strike



- ASB-32CL** Alum Spacer Bracket M32 Clear - 8"
- ASB-32BK** Alum Spacer Bracket M32 Black - 8"
- ASB-62CL** Alum Spacer Bracket M62 Clear - 8"
- ASB-62BK** Alum Spacer Bracket M62 Black - 8"
- ASB-82CL** Alum Spacer Bracket M82 Clear - 12"
- ASB-82BK** Alum Spacer Bracket M82 Black - 12"




STOP FILLER PLATES (SFP)

- Used to fill or extend a door stop
- Creates a flat mounting surface for the maglock
- Available in 1/4, 3/8, 1/2, and 5/8 inch thickness, all 1 1/4" wide



- SFP-1/4CL-8** SFP 1/4" Clear - 8"
- SFP-1/4BK-8** SFP 1/4" Black - 8"
- SFP-3/8CL-8** SFP 3/8" Clear - 8"
- SFP-3/8BK-8** SFP 3/8" Black - 8"
- SFP-1/2CL-8** SFP 1/2" Clear - 8"
- SFP-1/2BK-8** SFP 1/2" Black - 8"
- SFP-5/8CL-8** SFP 5/8" Clear - 8"
- SFP-5/8BK-8** SFP 5/8" Black - 8"
- SFP-1/4CL-12** SFP 1/4" Clear - 12"
- SFP-1/4BK-12** SFP 1/4" Black - 12"
- SFP-3/8CL-12** SFP 3/8" Clear - 12"
- SFP-3/8BK-12** SFP 3/8" Black - 12"
- SFP-1/2CL-12** SFP 1/2" Clear - 12"
- SFP-1/2BK-12** SFP 1/2" Black - 12"
- SFP-5/8CL-12** SFP 5/8" Clear - 12"
- SFP-5/8BK-12** SFP 5/8" Black - 12"

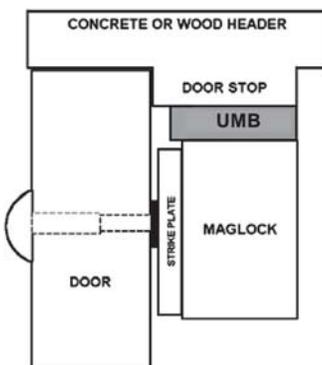

UNIVERSAL MOUNTING BRACKET (UMB)


- Permits M34 mounting on aluminum wood or concrete filled steel headers
- Replaces the ASB and CWB brackets
- Delivered with a selection of fasteners for different applications. 9-1/2" length



- UMB-34CL** Universal Mounting Bracket M34 Clear




Magnalock Brackets

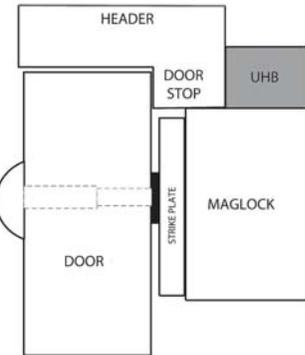

UNIVERSAL HEADER BRACKET (UHB)

- Used to extend the header 1 to 1-1/2 inches
- Provides a concealed wiring chamber


- UHB-CL-8** Universal Header Bracket Clear - 9-1/2"
- UHB-BK-8** Universal Header Bracket Black - 9-1/2"
- UHB-CL-12** Universal Header Bracket Clear - 13-1/2"
- UHB-BK-12** Universal Header Bracket Black - 13-1/2"

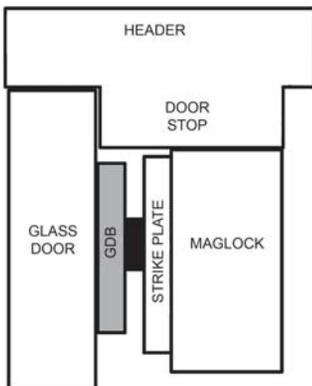

GLASS DOOR BRACKET and ADHESIVE KIT (GDB, AKG)

- Permits Magnalock installation on a solid glass door
- Permanently bonded to the glass with a special adhesive
- Strike plate screws into the bracket, as glass doors cannot be drilled


- GDB** Glass Door Bracket M32/38/62/68
- AKG** Adhesive Kit (up to 10 applications)

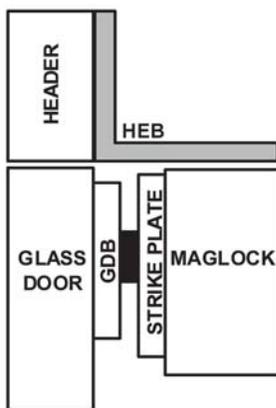

HEADER EXTENSION BRACKET (HEB)

- 90 degree angle brackets
- Extend narrow headers to permit mounting of Magnalocks
- Available in clear aluminum or black anodized
- HEB-3G allows for Magnalock installation on a glass door header

- HEB-3CL-8** Header Ext. Bracket 3" Clear - 8"
- HEB-3BK-8** Header Ext. Bracket 3" Black - 8"
- HEB-3CL-12** Header Ext. Bracket 3" Clear - 12"
- HEB-3BK-12** Header Ext. Bracket 3" Black - 12"
- HEB-3G** Header Ext. Bracket M32/62 Glass Door

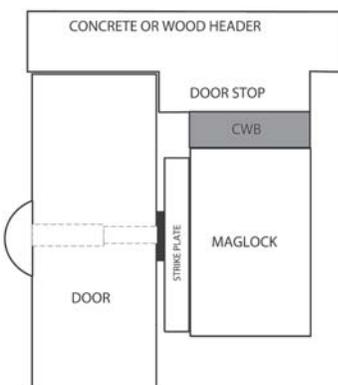

CONCRETE WOOD BRACKET (CWB)

- Used on wood or concrete filled metal frames
- Provides a concealed wire chamber
- Easier than blind nuts in some cases

- CWB-32CL** Concrete/Wood Bracket M32 Clear - 8"
- CWB-32BK** Concrete/Wood Bracket M32 Black - 8"
- CWB-62CL** Concrete/Wood Bracket M62 Clear - 8"
- CWB-62BK** Concrete/Wood Bracket M62 Black - 8"
- CWB-82CL** Concrete/Wood Bracket M82 Clear - 12"
- CWB-82BK** Concrete/Wood Bracket M82 Black - 12"