

Concrete for prestressed girders shall be Class A-1 with $f'_c = 8000$ psi and $f'_ci = 6500$ psi.

(+) indicates prestressing strand.


Use strands with an initial prestress force of _____ kips.

Prestressing tendons shall be uncoated, seven-wire, low-relaxation strands, 0.6 inch diameter in accordance with AASHTO M 203, Grade 270. Pretensioned members shall be in accordance with Sec 102.9.

Girders shall be lifted by devices designed by the fabricator.

** At the contractor's option the location for bent-up strands may be varied from that shown. The total number of bent-up strands shall not be changed. One strand tie bar is required for each layer of bent-up strands except at end bents which require one bar on the bottom layer of strands only. No additional payment will be made if additional strand tie bars are required.


*** Girder top flange shall be steel troweled to a smooth finish for 6" at the edges, as shown. Apply two layers of 30-lb roofing felt as a bond breaker to this region only excluding where joint filler is applied. The center portion shall be rough finished by scarifying the surface transversely with a wire brush, and no laitance shall remain on the surface.






BILL OF REINFORCING STEEL - EACH GIRDER			
NO.	SIZE & MAX. LENGTH	ACTUAL LENGTH	SHAPE
XXX 3	G301 2'-11 1/2"	15'	
XXX 4	G401 XX'-XX"	20'	
XXX X	G402 5'-1"	20'	

BENDING DIAGRAM	
SHAPE 15 (G301)	16" x 16" x 3/4" (Typ.)
SHAPE 20 (G401)	3'-10 1/2" COS(skew)
SHAPE 20 (G402)	

"THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT."
 DATE PREPARED: 12/4/2012
 ROUTE: _____ STATE: MO
 DISTRICT: BR SHEET NO. _____
 COUNTY: _____
 JOB NO.: _____
 CONTRACT ID.: _____
 PROJECT NO.: _____
 BRIDGE NO.: NU 63



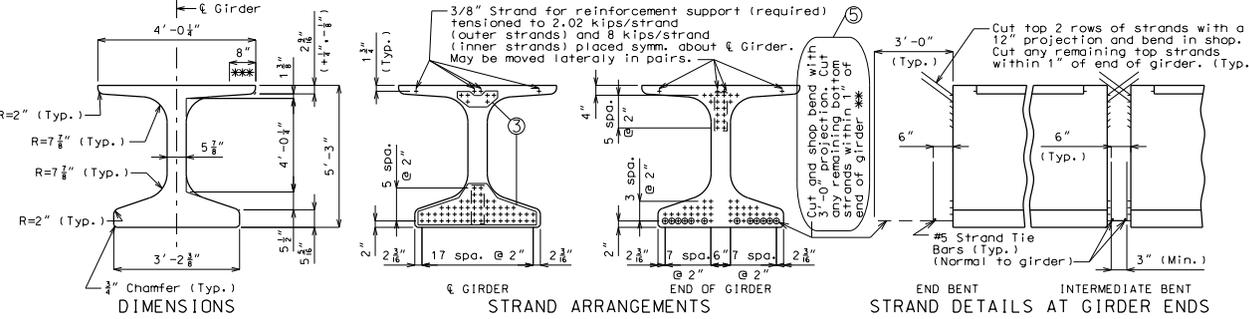


WELDED WIRE REINFORCEMENT (WWR4 & WWR5 as shown in Welded Wire Bending Diagrams)											
SPAN NO.	BAR SIZE	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10
X	X	X"	X'-X"	X"	X	X"	X'-X"	X"	X	X"	X'-X"
X	X	X"	X'-X"	X"	X	X"	X'-X"	X"	X	X"	X'-X"

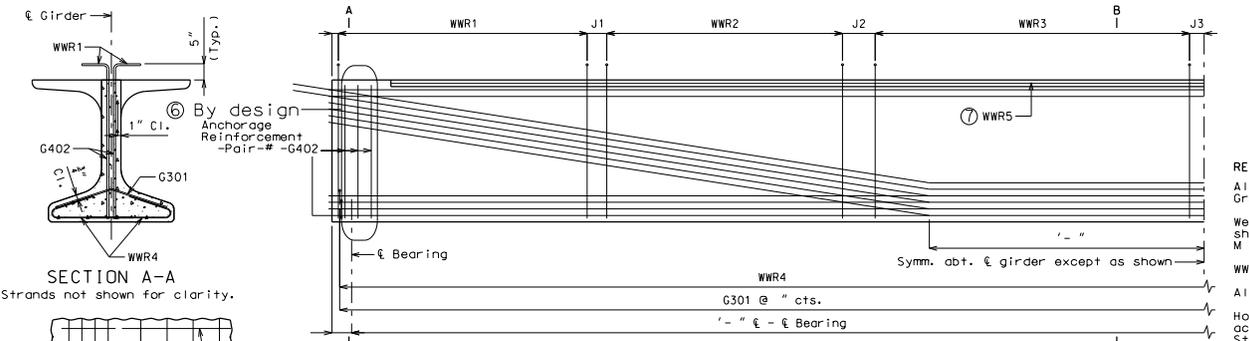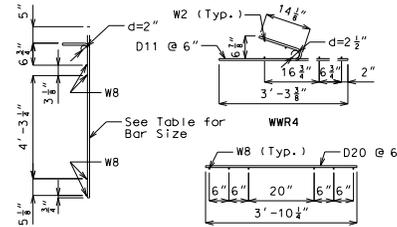

SECTION B-B
 Strands not shown for clarity.

REINFORCING STEEL NOTES:
 All bar reinforcement shall be Grade 60.
 Welded Wire Reinforcement (WWR) shall be in accordance with AASHTO M 221.
 WWR shall not be epoxy coated.
 All dimensions are out to out.
 Hooks and bends shall be in accordance with the CRSI Manual of Standard Practice for Detailing Reinforced Concrete Structures, Stirrup and Tie Dimensions.
 Minimum clearance to reinforcing shall be 1", unless otherwise shown.
 Actual bar lengths are measured along centerline of bar.
 1 1/2" hole cast horizontally in beam (skewed) for #6 bar 5'-6" long (Clear strands and reinforcing steel by 1 1/2" min.)
 #6 bar 5'-6" long (Clear strands and reinforcing steel by 1 1/2" min.)

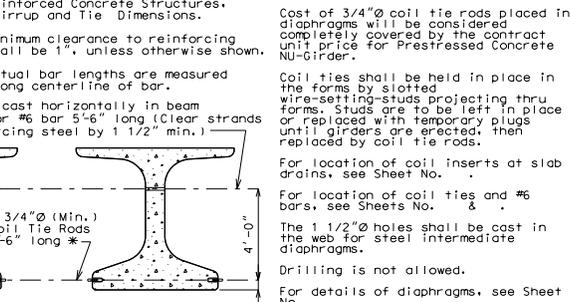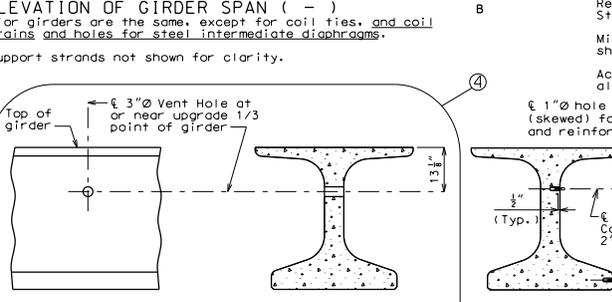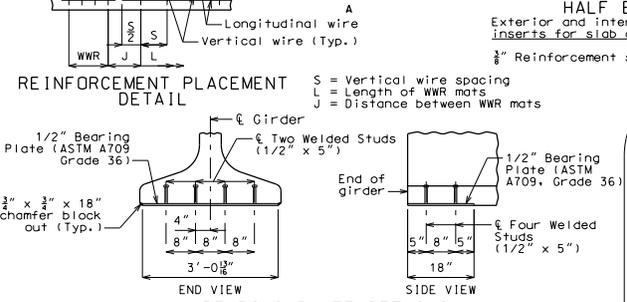

Galvanize the 1/2" bearing plate (ASTM A709 Grade 36) in accordance with ASTM A123.
 Cost of furnishing, galvanizing, and installing the 1/2" bearing plate (ASTM A709 Grade 36) and welded studs in the prestressed girder will be considered completely covered by the contract unit price for Prestressed Concrete NU-Girder.

Place vent holes at or near upgrade 1/3 point of girders and clear reinforcing steel or strands by 1 1/2" minimum and steel intermediate diaphragm bolt connections by 6" minimum.

Coil ties shall be held in place in the forms by slotted wire-setting-studs projecting thru forms. Studs are to be left in place or replaced with temporary plugs until girders are erected, then replaced by coil tie rods.
 For location of coil inserts at slab drains, see Sheet No. _____ & _____.
 For location of coil ties and #6 bars, see Sheets No. _____ & _____.
 The 1 1/2" holes shall be cast in the web for steel intermediate diaphragms.
 Drilling is not allowed.
 For details of diaphragms, see Sheet No. _____.
 For Girder Camber Diagram, see Sheet No. _____.
 Alternate bar reinforcing steel details are provided and may be used. Some type of reinforcing steel shall be used for all girders in all spans.
 * Length of coil tie rods at exterior girders at end bents = _____.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
 DATE: _____
 DESCRIPTION: _____
 IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.
 PROJECT NO. _____
 BRIDGE NO. NU 63
 COUNTY: _____
 JOB NO.: _____
 CONTRACT ID.: _____
 PROJECT NO.: _____
 BRIDGE NO.: NU 63
 MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
 105 WEST CAPITOL JEFFERSON CITY, MO 65102
 1-888-ASK-MODOT (1-888-275-6636)