




25'-0"

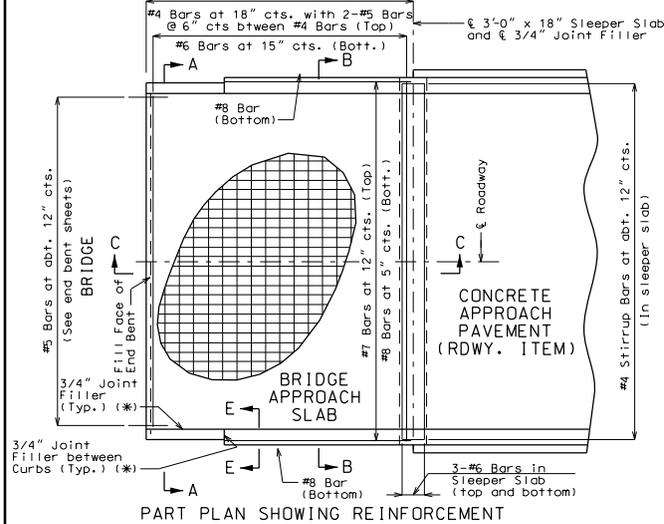

PART PLAN SHOWING REINFORCEMENT

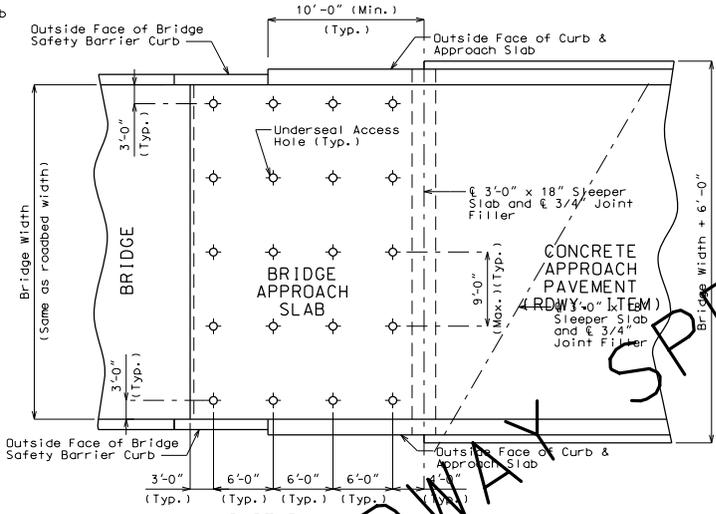


PART PLAN (SHOWING TYPICAL UNDERSEAL ACCESS HOLE LOCATIONS)

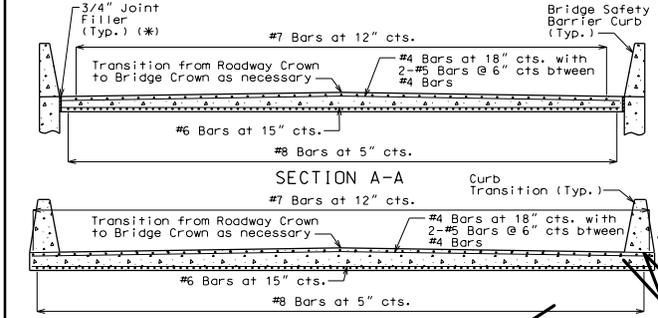


SECTION A-A

SECTION B-B

Note: With the approval of the engineer, the contractor may crown the bottom of the approach slab to match the crown of the roadway surface.

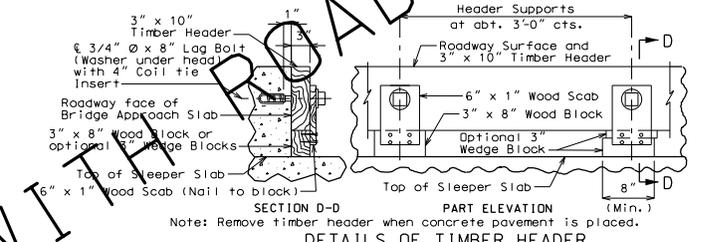


DETAILS OF TIMBER HEADER

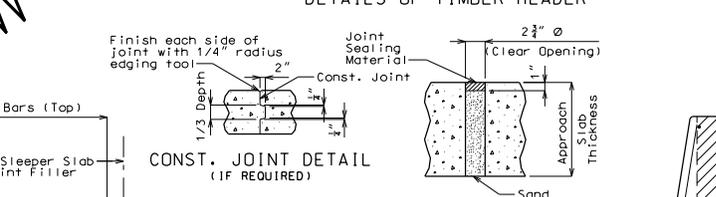


CONST. JOINT DETAIL (IF REQUIRED)

TYPICAL UNDERSEAL ACCESS HOLE DETAIL

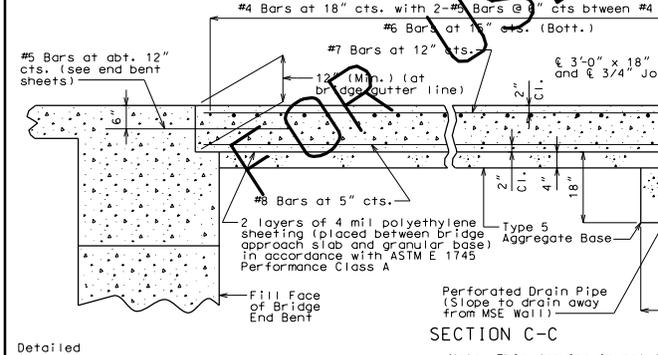


SECTION C-C

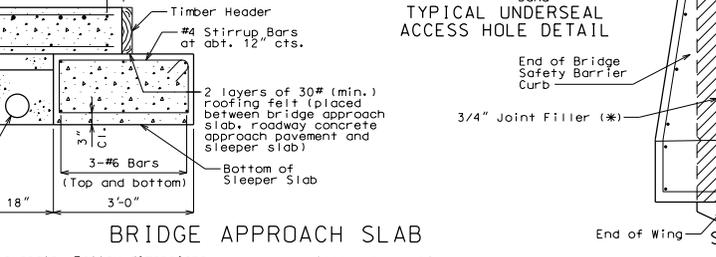


BRIDGE APPROACH SLAB SECTION E-E (BETWEEN CURBS)

**GENERAL NOTES:**

- All concrete for the bridge approach slab and sleeper slab shall be in accordance with Sec 503 (F<sub>c</sub> = 4,000 psi).
- All joint filler shall be in accordance with Sec 1057 for preformed fiber expansion joint filler, except as noted.
- The reinforcing steel in the bridge approach slab and the sleeper slab shall be epoxy coated Grade 60 with F<sub>y</sub> = 60,000 psi.
- Minimum clearance to reinforcing steel shall be 1 1/2", unless otherwise shown.
- The reinforcing steel in the bridge approach slab and the sleeper slab shall be continuous. The transverse reinforcing steel shall be continuous by lap splicing the #4 & #5 bars 18" and 2'-2", respectively.
- Mechanical bar splices shall be in accordance with Sec 604.
- Seal joint between vertical face of approach slab and wing with "Silicone Joint Sealant for Saw Cut and Formed Joints" in accordance with Sec 717.
- Hooks and bends shall be in accordance with the CRSI Manual of Standard Practice for Detailing Reinforced Concrete Structures, Stirrup and Tie Dimensions.
- The contractor shall pour and satisfactorily finish the bridge or semi-deep slab before pouring the bridge approach slabs.
- Longitudinal construction joints in approach slab and sleeper slab shall be aligned with longitudinal construction joints in bridge or semi-deep slab.
- Payment for furnishing all materials, labor and excavation necessary to construct the approach slab, including the timber header, sleeper slab, underdrain, Type 5 aggregate base, joint filler and all other appurtenances and incidental work as shown on this sheet, complete in place, will be considered completely covered by the contract unit price for Bridge Approach Slab (Bridge) per square yard.
- For Concrete Approach Pavement details, see roadway plans.
- See Roadway Special Sheet for Permanent Concrete Traffic Barrier Atop MSE Wall.
- At the contractor's option, Grade 40 reinforcement may be substituted for the Grade 60 reinforcement connecting the bridge approach slab to the bridge abutment. No additional payment will be made for this substitution.
- When Grade 40 reinforcement is substituted for the Grade 60 reinforcement connecting the bridge approach slab to the bridge abutment, the reinforcement may be bent up to 90 degrees with a 2' minimum radius near the abutment to allow compaction of the backfill material near the abutment. Damage to epoxy coating shall be repaired in accordance with Sec 710.
- Drain pipe may be either 6" diameter corrugated metallic-coated pipe underdrain, 4" diameter corrugated polyvinyl chloride (PVC) drain pipe, or 4" diameter corrugated polyethylene (PE) drain pipe.



#4 STIRRUP BAR (ACTUAL LENGTH = 8'-3/4")

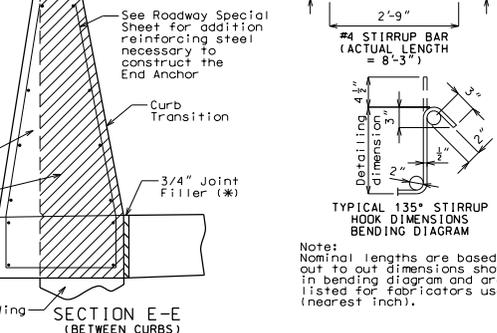

TYPICAL 13x13 STIRRUP HOOK DIMENSIONS BENDING DIAGRAM

Note: Nominal lengths are based on cut-to-out dimensions shown in bending diagram and are listed for fabricator's use (nearest inch).

THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT.

DATE PREPARED 9/30/2011

ROUTE STATE MO

DISTRICT SHEET NO. BR \*

COUNTY \*

JOB NO. \*

CONTRACT ID. \*

PROJECT NO. \*

BRIDGE NO. APN SP

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)



SPECIAL WITH ROADWAY