



**SECTION D-D**  
Note: Strip seal gland not shown for clarity.

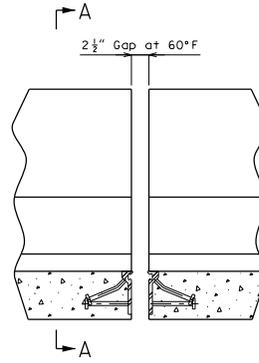


Note: Strip seal gland not shown for clarity.  
**PART ELEVATION OF BARRIER CURB**

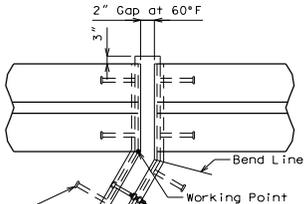


3/4" x 8" Welded shear connector studs alternately spaced at about 9" cts. (Typ.)

1/2" Machine bolt at about 18" cts. Cut machine bolt flush with steel armor after concrete on each side has taken initial set. (Typ.)

Steel Girder

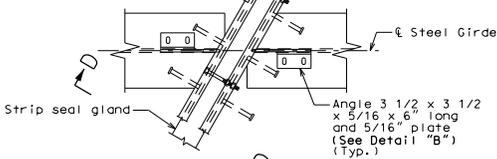


**PART PLAN**

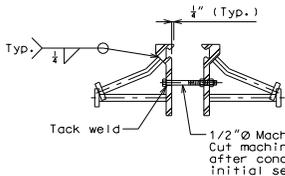


**DETAIL "A"**


1/2" Machine bolts and nut with 9/16" holes (Shop or field drill) in top flange (Remove bolt after concrete has set.)

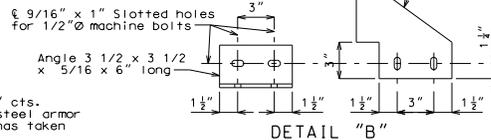

**DETAIL "B"**

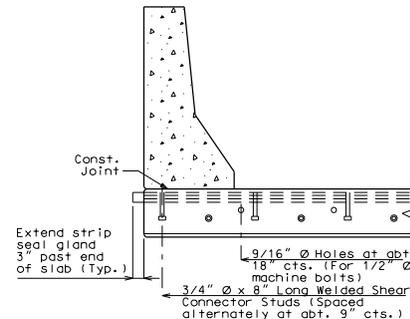

**PART SECTION A-A**

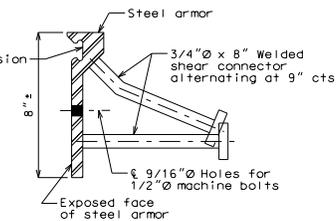

**DETAIL OF JOINT ARMOR**

**STANDARD DRAWING GUIDANCE (do not show on plans):**

- Strip seal gland size.
- Installation gap temperature adjustment normal to the joint.

**GENERAL NOTES:**

Expansion joint system shall be fabricated in one section, except for stage construction and when the length is over 50 feet. A complete joint penetration groove welded splice shall be required. Welds shall be ground flush to provide a smooth surface. The expansion joint system shall be fabricated and installed to the crown and grade of the roadway.

The strip seal gland shall be installed in joints in one continuous piece without field splices. Factory splicing will be permitted for joints in excess of 53 feet.


Structural steel for the expansion joint system shall be ASTM A709, Grade 36 except the steel armor may be ASTM A709 Grade 50W. Anchors for the expansion joint system shall be in accordance with Sec 1037. Strip seal expansion joint system shall be in accordance with Sec 717.

Structural steel for the expansion joint system shall be coated with a minimum of two coats of inorganic zinc primer (5 mils minimum) or galvanized in accordance with ASTM A123. Anchors need not be protected from overspray.

Plan dimensions are based on installation at 60°F. The expansion gap and other dimensions shall be increased or decreased 1/4" for each 10° fall or rise in temperature at installation.

Longitudinal reinforcing steel shall be placed so that ends shall not be more than 31" from vertical leg of the steel armor at the expansion joint system.

Concrete shall be forced under and around steel armor and anchors. Proper consolidation of the concrete shall be achieved by localized internal vibration.



Single layer gland, multiple layer glands not allowed

Strip seal gland size = [ ] ①

**DETAIL OF GLAND**

DATE PREPARED 1/5/2012		STATE MO	
ROUTE		SHEET NO.	
DISTRICT		COUNTY	
JOB NO.		CONTRACT NO.	
PROJECT NO.		BRIDGE NO. STS04	
DESCRIPTION		DATE	
MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION		105 WEST CAPITOL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)	

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

