



SECTION THROUGH DITCH  
(SHOWING TOE WALL)

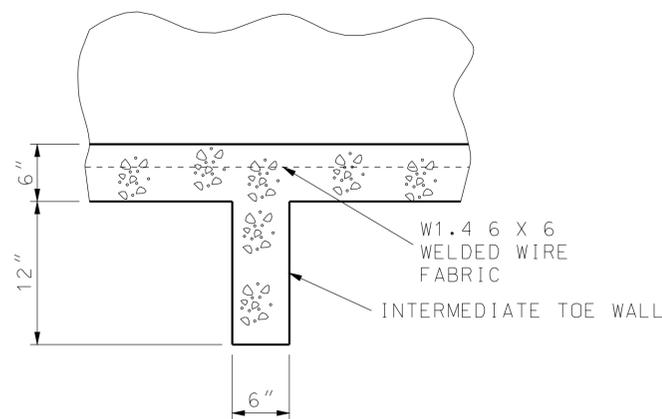

SECTION A-A

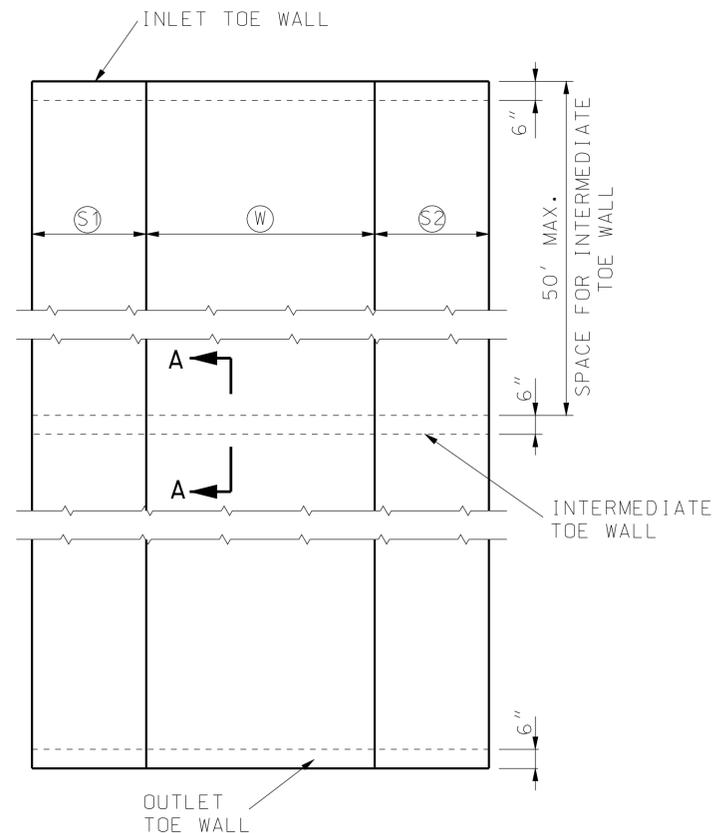

PLAN

LEGEND

- ⓓ VERTICAL PAVED DITCH HEIGHT.
- ⓔ SOD, GEOTEXTILE FABRIC, OR EROSION CONTROL MAT, IF REQUIRED.
- Ⓢ1 THE WIDTH OF THE STEEPER SIDEWALL OF ALL DITCHES.
- Ⓢ2 THE WIDTH OF THE FLATTER SIDEWALL OF ALL DITCHES.
- Ⓦ THE WIDTH OF THE BOTTOM OF A FLAT BOTTOM DITCH

GENERAL NOTES:

WELDED STEEL WIRE FABRIC SHALL CONFORM TO THE REQUIREMENTS OF SECTION 1036.1.3 OF STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

SOD, GEOTEXTILE FABRIC, OR EROSION CONTROL MATS SHALL BE USED ALONG THE SIDES IF SHOWN ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.

TOE WALLS SHALL BE CONSTRUCTED AT INLET AND OUTLET ENDS OF PAVED DITCHES AND AT 50' MAXIMUM SPACING FOR INTERMEDIATE TOE WALLS.



**MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION**

105 WEST CAPITOL  
JEFFERSON CITY, MO 65102  
1-888-ASK-MODOT (1-888-275-6636)

"THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT."

**PAVED DITCHES**

DATE EFFECTIVE: 03/01/1993  
DATE PREPARED: 8/21/2009

**609.15C**

SHEET NO.  
1 OF 1