

FOR CONTROLLER CABINETS WITH HEIGHTS FROM 6'-1" TO 6'-6"
TYPE E


FOR CONTROLLER CABINETS WITH HEIGHTS FROM 4'-4" TO 6'-0"
TYPE EV

DOUBLE

FOR TYPE 170 CONTROLLER CABINETS
TYPE 332

FOR TYPE 170 CONTROLLER CABINETS
TYPE 336S

CONTROLLER CABINETS AND BASE TYPES

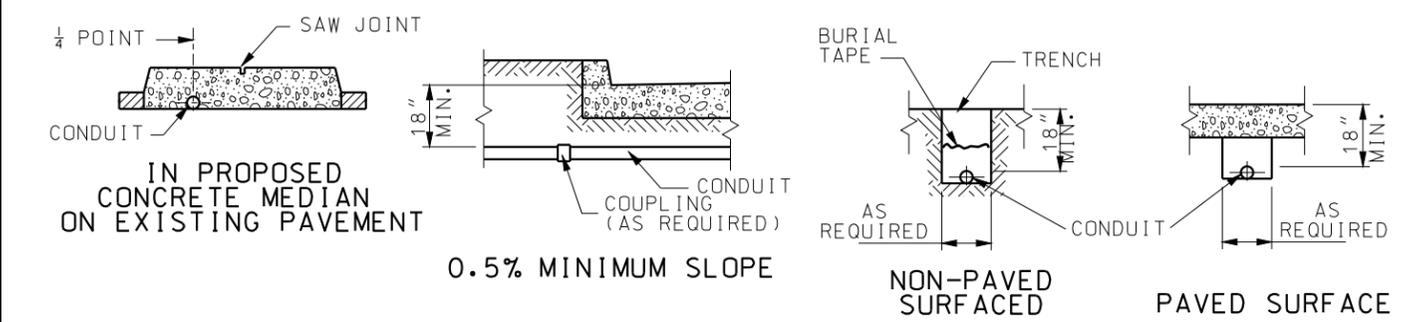

CONDUIT LOCATIONS

- NOTES:
- ① DIMENSION VARIES ACCORDING TO CABINET HEIGHT.
 - ② GROUND ROD, 3/4" DIA. x 8' MIN. IF SUBSURFACE CONDITIONS EXIST WHICH PROHIBIT THE PLACEMENT OF THE GROUND ROD IN A VERTICAL POSITION, THE ROD MAY BE DRIVEN AT AN OBLIQUE ANGLE NOT TO EXCEED 45 DEGREES FROM VERTICAL OR BURIED IN A TRENCH AT LEAST 30 IN. DEEP. CONNECTION TO GROUND ROD SHALL BE CADWELDED.
 - ③ LIFETIME SILICONE CAULK BETWEEN CABINET AND BASE.
 - ④ #2 CORBIN LOCK
 - ⑤ ANCHOR BOLTS (USE BOLT HEAD OR TACK WELDED NUT ON EMBEDDED END AND SIZE AS SPECIFIED BY CABINET MANUFACTURER).

<p>MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION</p> <p>105 WEST CAPITOL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)</p>	
	<p>TRAFFIC SIGNALS CONTROLLERS CONDUIT LOCATION</p>
DATE EFFECTIVE: 04/01/2005 DATE PREPARED: 8/26/2009	<p>902.100</p>
SHEET NO. 1 OF 1	

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.